


SLT-22B

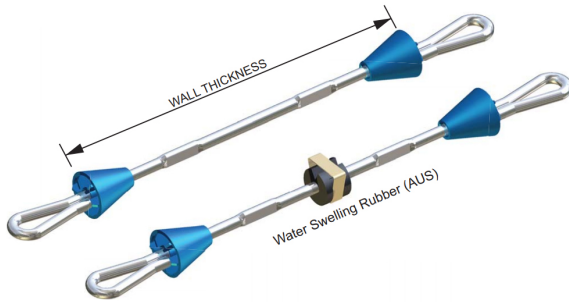

OCM SPEED LOCK TIES are used to build wood forming using standard $\frac{3}{4}$ " plyform with 2x4s for the walers and stiff backs (strong backs).

Part Number	SLT-22B
Safe Working Load (lbs)	2,250
Wall Size (in)	22"
Weight Per Piece (lbs)	0.41