

Double Waler Bracket

Description:


Installation:

1. Fasten Double Waler Bracket to the studs with double headed nails through the three nail holes provided in the bracket.
2. Insert walers.
3. Secure with Snap Tie Steel Wedge on the steel pin of the Double Waler Bracket.

Features:

- Eliminates unsafe toenail connections
- Successfully support, space, and hold in place walers completely independent of wall ties and clamps.
- Waler lumber can be saved by using this bracket.
- Normal spacing is 4' on center.
- Available in two sizes for 2x4's and 2X6's.
- Galvanized for corrosion resistance

Additional Notes: Additional lengths available upon request.
Water seal available upon request. SWL provides a safety factor of approximately 2 to 1.

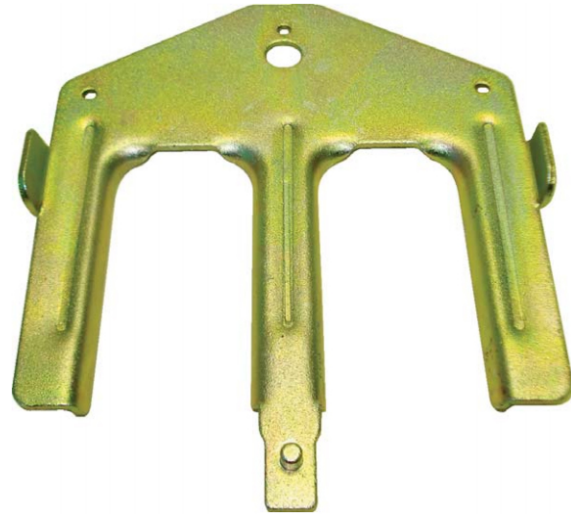

Item Number	Weight Per Piece (lbs)	Carton Quantity	Size
WB2X4	0.91	25	2 x 4
WB2X6	1	25	2 x 6