


FLFI100X600G (GALVANIZED)

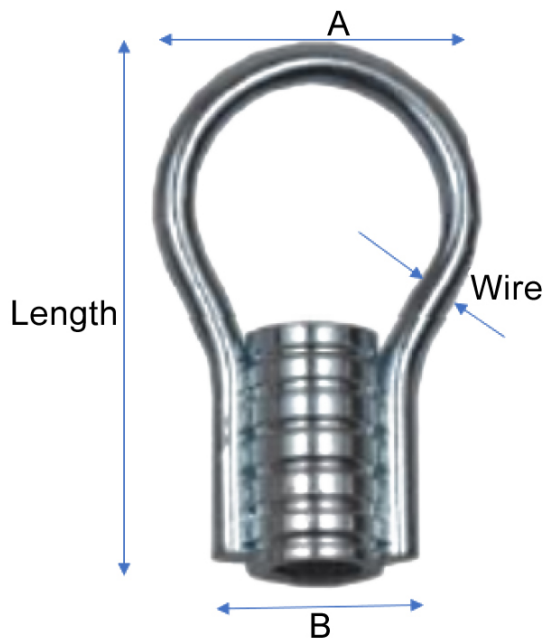

Ferrule Loop Inserts are used for structural connections and suspension of piping,

Part Number	FLFI100X600G (GALVANIZED)
A (in)	1-5/8"
B (in)	1-5/16"
Length (in)	6"
Min. Edge Distance (in)	10"
Shear (lbs)	5300
Min. Corner Distance (in)	15"
Tension (lbs)	5300
Bolt Dia. UNC Thread	1-8
D Wire Dia. (in)	.375"