


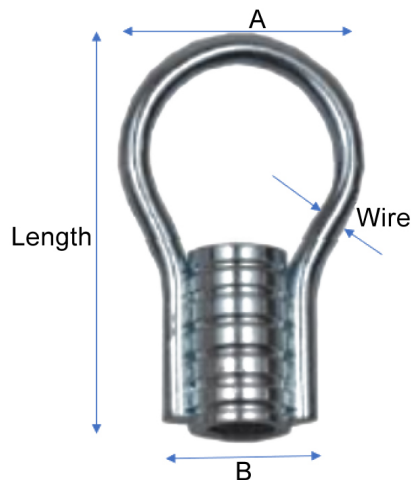

## FLFI375X275P

Ferrule Loop Inserts are used for structural connections and suspension of piping,

|                                  |              |
|----------------------------------|--------------|
| <b>Part Number</b>               | FLFI375X275P |
| <b>A (in)</b>                    | 1-1/4"       |
| <b>B (in)</b>                    | 1/2"         |
| <b>Length (in)</b>               | 2-3/4"       |
| <b>Min. Edge Distance (in)</b>   | 10"          |
| <b>Shear (lbs)</b>               | 2000         |
| <b>Min. Corner Distance (in)</b> | 15"          |
| <b>Tension (lbs)</b>             | 2000         |
| <b>Bolt Dia. UNC Thread</b>      | 3/8-16       |
| <b>D Wire Dia. (in)</b>          | .256"        |