


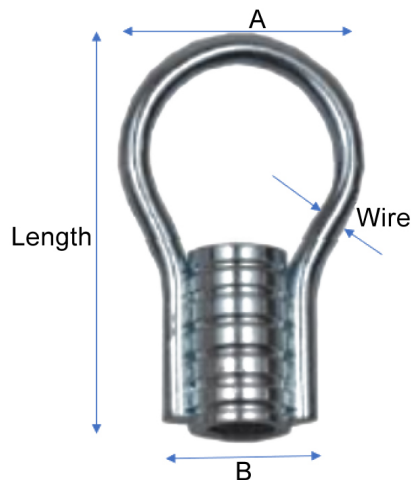

## FLFI625X350P

Ferrule Loop Inserts are used for structural connections and suspension of piping,

|                                  |              |
|----------------------------------|--------------|
| <b>Part Number</b>               | FLFI625X350P |
| <b>A (in)</b>                    | 1-5/8"       |
| <b>B (in)</b>                    | 13/16"       |
| <b>Length (in)</b>               | 3-1/2"       |
| <b>Min. Edge Distance (in)</b>   | 8"           |
| <b>Shear (lbs)</b>               | 2000         |
| <b>Min. Corner Distance (in)</b> | 8"           |
| <b>Tension (lbs)</b>             | 2000         |
| <b>Bolt Dia. UNC Thread</b>      | 5/8-11       |
| <b>D Wire Dia. (in)</b>          | .256"        |